


PD2209141

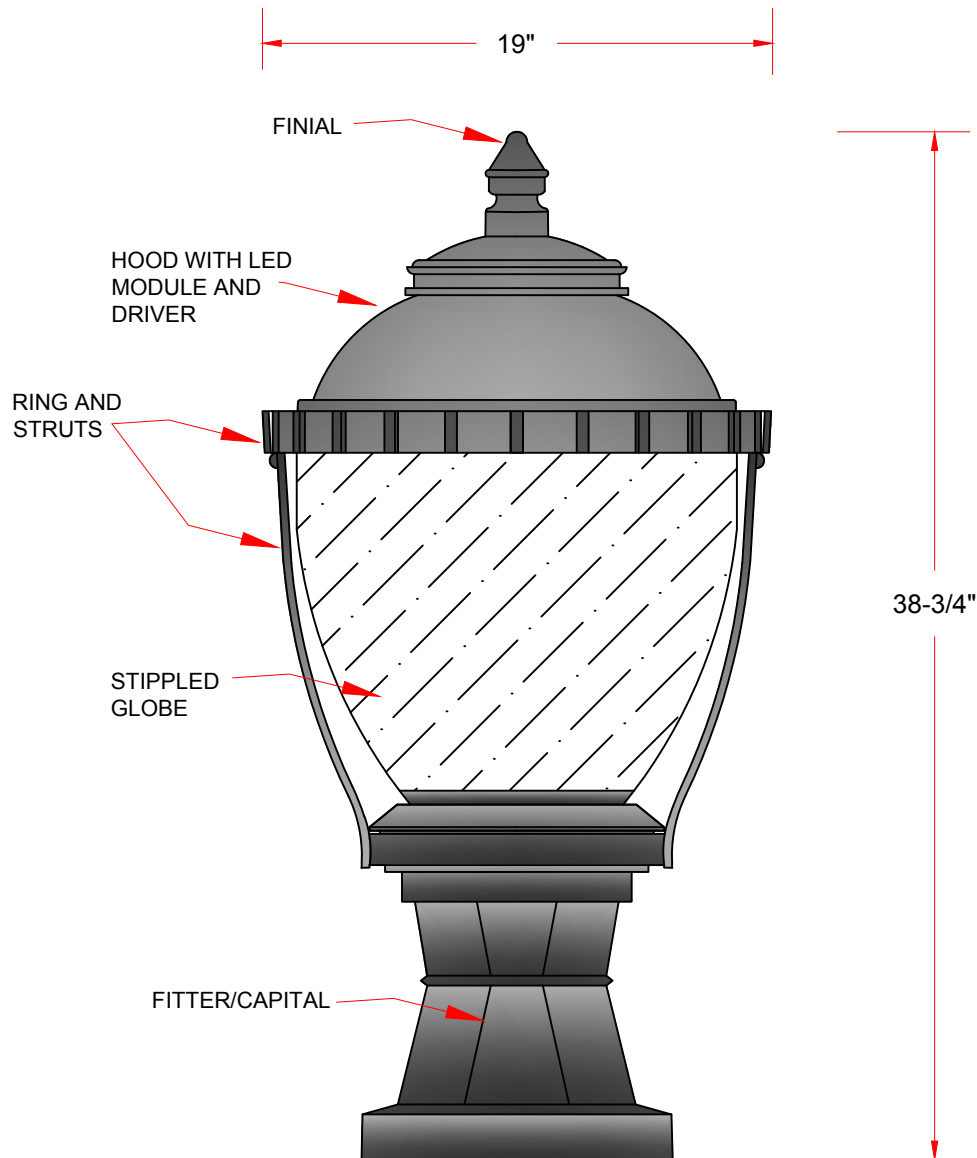

Finial: cast aluminum

Hood: spun aluminum

Lens: stippled acrylic

IES Type: TBD

LEDs: 40W, COB (Bridgelux or equivalent), approx. 4,750 lms

CCT: 4,000K

Driver: constant current

Struts: cast aluminum

Fitter/capital: cast aluminum

Mounting method: slip over existing tenon (advise dimensions), secured with (4) s/s screws

All exposed hardware: stainless steel


Finish: smooth semi-gloss TGIC polyester powder coat

Color: standard black

JARVIS ST RECONSTRUCTION

Date: Sep. 14, 2022

Model: SH20MOD-SA-CP-4L4K-BLK



Sheridan Lighting Systems, Inc.
6-2400 Dundas St W
Mississauga ON L5K 2R9

© 2022 Sheridan Lighting Systems, Inc. All rights reserved. Specifications subject to change without notice.

T 905-369-0101 T 1-866-667-9517
sales@sheridansys.com www.sheridansys.com