SH05

EPA: 1.45


Weight: approx. 24 lbs 36"

Specifications

The SH05 series luminaire shall consist of a diffuser, a capital, and a ballast assembly. The lower section of the acornshaped diffuser shall be made of refractive acrylic and the top shall be made of stippled polycarbonate, which may be topped with an optional finial. A perforated lid shall be installed between the two sections of the diffuser for improved optical performance and minimal uplight component. The diffuser shall be secured to the cast aluminum capital with stainless steel hardware, featurning tool-less entry. All castings shall be formed true to pattern, with no warping or mold

The electrical and optical components shall be mounted on a cast aluminum ballast plate within the capital. The medium or mogul porcelain socket shall be 4kV pulse rated. The HID ballast shall be HPF, CWA, multi-tap, supplied with capacitor and ignitor. Luminaire shall be ETL certifed as suitable for wet locations. Lamps by others.

The luminaire shall mount to a 3"OD or 4"OD x 3"H tenon with three sets of two stainless steel tamper resistant screws. All exposed metal parts shall receive baked-on smooth semigloss powder coat finish. Ships boxed and palletized.

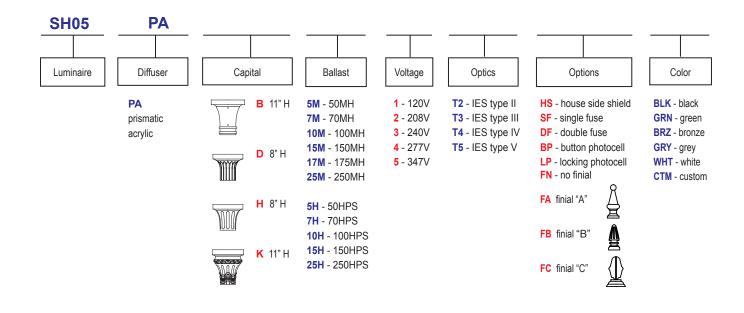

3"I.D.

× 3″H

Suggested pole and bracket combinations





