


# SH75

# Specifications

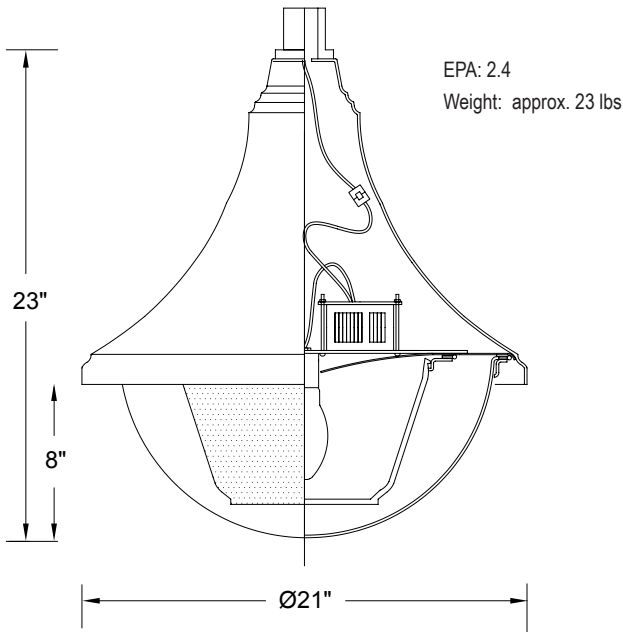

The SH75 series luminaire shall consist of a spun aluminum body, a clear or opal acrylic diffuser, an integral ballast assembly and internal optical components. The hinged diffuser shall be secured to the spun aluminum body with a spinning. The luminaire shall have tool-less entry.


The electrical and optical components shall be mounted on a cast aluminum ballast plate within the luminaire. The medium or mogul porcelain socket shall be 4kV pulse rated. The HID ballast shall be HPF, CWA, multi-tap, supplied with capacitor and ignitor. Luminaire shall be ETL certified as suitable for wet locations. Lamps by others.

The optical assembly shall be mechanically secured to the ballast plate.


The luminaire shall mount to a mounting arm via a 2"OD x 2"H integral tenon with three stainless steel tamper resistant screws and one security thru-bolt. Order arm separately. All exposed metal parts shall receive baked-on smooth semi-gloss powder coat finish. Ships assembled, boxed and palletized.

## SH75

Luminaire	Diffuser	Ballast	Voltage	Optics	Options	Color
	<b>CA</b> clear acrylic  <b>WA</b> white acrylic	<b>5M</b> - 50MH <b>7M</b> - 70MH <b>10M</b> - 100MH <b>15M</b> - 150MH <b>17M</b> - 175MH  <b>5H</b> - 50HPS <b>7H</b> - 70HPS <b>10H</b> - 100HPS <b>15H</b> - 150HPS	<b>1</b> - 120V <b>2</b> - 208V <b>3</b> - 240V <b>4</b> - 277V <b>5</b> - 347V	<b>BA</b> - bare lamp <b>A5</b> - acrylic refractor IES V <b>A3</b> - acrylic refractor IES III <b>P5</b> - polycarbonate refractor IES V <b>P3</b> - polycarbonate refractor IES III	<b>HS</b> - house side shield <b>SF</b> - single fuse <b>DF</b> - double fuse <b>BP</b> - button photocell (remote) <b>LP</b> - locking photocell (remote)	<b>BLK</b> - black <b>GRN</b> - green <b>BRZ</b> - bronze <b>GRY</b> - grey <b>WHT</b> - white <b>CTM</b> - custom



Suggested pole and bracket combinations



with SA20-A

**Sheridan**  
lighting systems, inc.